


# Coalescing Filter Regulators



FR365F

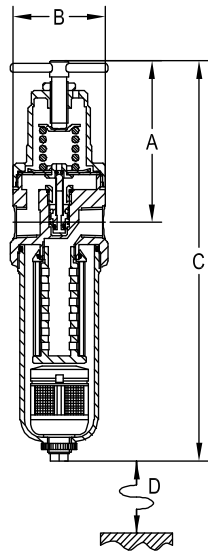

FR365A



FR370A

## Principal Specifications

Housing Model	FR365	FR365F	FR365A	FR365AF	FR370	FR370F	FR370A	FR370AF
Port Size - NPT	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Gauge Port - NPT	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Drain Type (3)	Manual	Automatic	Manual	Automatic	Manual	Automatic	Manual	Automatic
Maximum Inlet Pressure - Bar	10	10	16	16	10	10	16	16
Maximum Temperature - °C	50	50	100	100	50	50	100	100
<b>Materials of Construction (2)</b>								
Head	Al	Al	Al	Al	Al	Al	Al	Al
Internals	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon
Bowl	Pc	Pc	Al	Al	Pc	Pc	Al	Al
Gaskets	Nitrile	Nitrile	Nitrile	Nitrile	Nitrile	Nitrile	Nitrile	Nitrile
<b>Principal Dimensions</b>								
A - mm	115	115	115	115	115	115	115	115
B - mm	68	68	68	68	68	68	68	68
C - mm	270	290	280	290	380	380	380	380
D - mm	72	72	72	72	184	140	184	140
Weight - kg	1.00	1.00	1.10	1.10	1.05	1.05	1.20	1.20
<b>Accessories</b>								
Gasket Set	GNFR360	GNFR360	GNFR360	GNFR360	GNFR360	GNFR360	GNFR360	GNFR360
Mounting Bracket	MBFR360	MBFR360	MBFR360	MBFR360	MBFR360	MBFR360	MBFR360	MBFR360
<b>Filter Element Codes (1)</b>								
Disposable Element	25-64-xx	25-64-xx	25-64-xx	25-64-xx	25-178-xx	25-127-xx	25-178-xx	25-127-xx

- Notes (1) Replace 'xx' with grade required, 50C, 70C or CC. CC cartridges are not used in housings with automatic drains.  
 (2) Material abbreviations: Al=Anodised aluminium, Pc=Polycarbonate, SS=Stainless Steel.  
 (3) Auto float drains require minimum 1 bar pressure to function correctly.