


High Efficiency Coalescing Filters

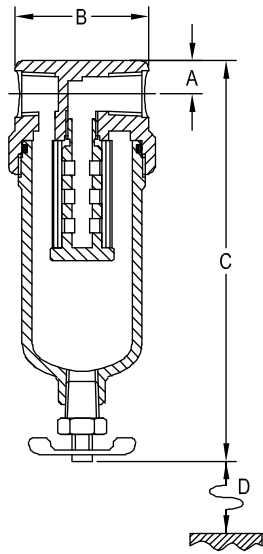

Principal Specifications

Housing Model	310	315	310A	315A
Port Size - NPT	1/8"	1/4"	1/8"	1/4"
Drain Type	Manual	Manual	Manual	Manual
Maximum Pressure - Bar	10	10	16	16
Maximum Temperature - °C	50	50	120	120
Materials of Construction (2)				
Head	Al	Al	Al	Al
Bowl	Pc	Pc	Al	Al
Internals	Nylon	Nylon	Nylon	Nylon
Gaskets	Nitrile	Nitrile	Nitrile	Nitrile
Principal Dimensions				
A - mm	10	10	10	10
B - mm	40	40	40	40
C - mm	106	106	118	118
D - mm	38	38	38	38
Volume - cc	35	35	45	45
Weight - kg	0.11	0.11	0.16	0.16
Accessories				
Standard Gasket Set	GN315	GN315	GN315	GN315
Viton Gasket Set	GV315	GV315	GV315	GV315
Mounting Bracket	MB315	MB315	MB315	MB315
Bowl Guard	BG315	BG315	N/A	N/A
Filter Element Codes (1)				
Disposable Element	12-32-xx	12-32-xx	12-32-xx	12-32-xx

Notes (1) Replace 'xx' with grade required, 50C, 70C or CC. CC cartridges are not used in housings with automatic drains.
 (2) Material abbreviations: Al=Anodised aluminium, Pc=Polycarbonate, SS=Stainless Steel.