


High Efficiency Coalescing Filters

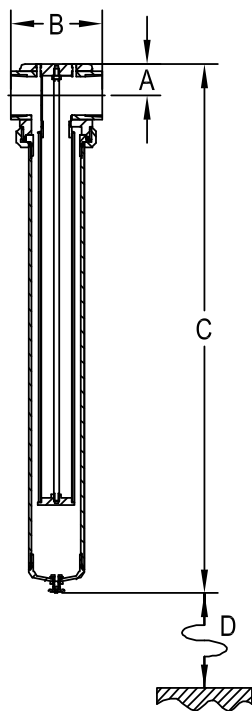

Principal Specifications

Housing Model	395A	395AF	395AI	395AFI
Port Size - NPT	3"	3"	3"	3"
Drain Type (3)	Manual	Automatic	Manual	Automatic
Maximum Pressure - Bar	16	16	16	16
Maximum Temperature - °C	120	120	120	120
Materials of Construction (2)				
Head	Al	Al	Al	Al
Bowl	Al	Al	Al	Al
Internals	Al/SS	Al/SS	Al/SS	Al/SS
Gaskets	Nitrile	Nitrile	Nitrile	Nitrile
Principal Dimensions				
A - mm	65	65	65	65
B - mm	190	190	190	190
C - mm	1075	1151	1075	1151
D - mm	770	770	770	770
Volume - cc	7055	7035	7055	7035
Weight - kg	10.9	10.9	10.9	10.9
Accessories				
Standard Gasket Set	GN395	GN395	GN395	GN395
Viton Gasket Set	GV395	GV395	GV395	GV395
Mounting Bracket	MB395	MB395	MB395	MB395
Filter Element Codes (1)				
Disposable Element	63-762-xx	63-762-xx	63-762-xx	63-762-xx

- Notes (1) Replace 'xx' with grade required, 50C, 70C or CC. CC cartridges are not used in housings with automatic drains.
 (2) Material abbreviations: Al=Anodised aluminium, Pc=Polycarbonate, SS=Stainless Steel.
 (3) Auto float drains require minimum 1 bar pressure to function correctly.