


# High Efficiency Coalescing Filters



B360 - 1/4"

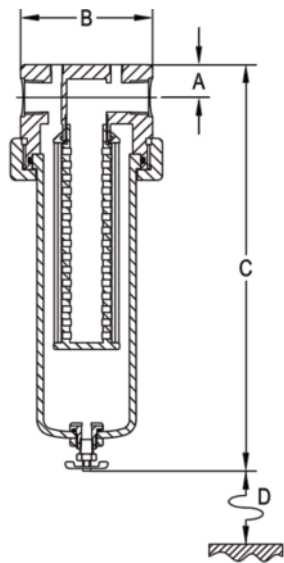

B365 - 1/2"



B146 - 3/4"



B370 - 1"

## Principal Specifications

Housing Model	B360	B365	B146	B370
Port Size - NPT	1/4"	1/2"	3/4"	1"
Drain Type	Manual	Manual	Manual	Manual
Maximum Pressure - Bar	16	16	16	16
Maximum Temperature - °C	120	120	120	120
<b>Materials of Construction</b>				
Head	Brass	Brass	Brass	Brass
Bowl	Brass	Brass	Brass	Brass
Internals	Nylon	Nylon	Brass	Nylon
Gaskets	Viton	Viton	Viton	Viton
<b>Principal Dimensions</b>				
A - mm	15.5	15.5	18	18
B - mm	62	62	62	62
C - mm	162	162	265	265
D - mm	72	72	190	190
Volume - cc	150	150	300	300
Weight - kg	0.7	0.8	1.1	1.2
<b>Accessories</b>				
Standard Gasket Set	GVB360	GVB360	GVB360	GVB360
Mounting Bracket	MB360	MB360	MB360	MB360
<b>Filter Element Codes (1)</b>				
Disposable Element	25-64-xx	25-64-xx	25-178-xx	25-178-xx

Notes (1) Replace 'xx' with grade required, 50C, 70C or CC. CC cartridges are not used in housings with automatic drains.