



# HF Headline Filters

## Filter Element: 25-64-4A

Technical Specification	
<b>Description</b>	Disposable Particulate Filter Element
<b>Materials of Construction</b>	Borosilicate Glass Microfibres bonded with Epoxide Ester resin only
	Nylon End Caps with Viton Seals
<b>Air Flow Resistance</b>	Less than 2.8KPa at 6 m/min in air at 25°C
<b>Dimensions</b>	I.D. - 26.0mm ± 0.25mm
	O.D. - 40.0mm ± 1.5mm
	Length - 64.0mm ± 0.25mm
<b>Volume</b>	20cc
<b>Maximum Temperature</b>	50°C
<b>Adsorption of</b>	CO <sub>2</sub> , NH <sub>3</sub> , H <sub>2</sub> S, SO <sub>x</sub>

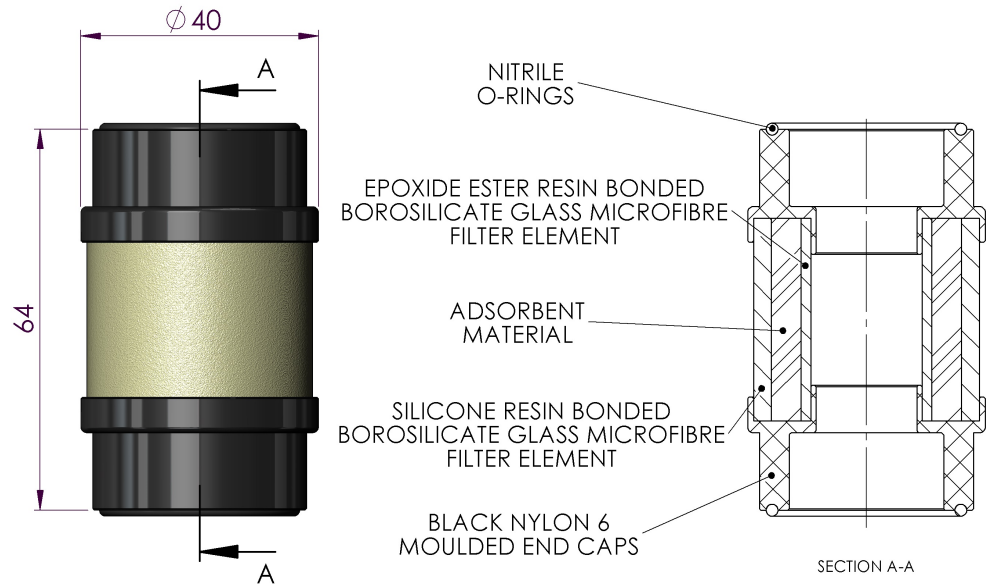

For further specific information please contact our Technical Department  
This is a guide only

Headline Filters Limited Mill Hall Business Estate Aylesford Kent, ME20 7JZ <a href="http://www.headlinefilters.com">www.headlinefilters.com</a> <a href="mailto:info@headlinefilters.com">info@headlinefilters.com</a>	<b>Filter Element: 25-64-4A</b>		THE COPYRIGHT OF THIS DRAWING IS RESERVED BY HEADLINE FILTERS. IT IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY, OR IN PART WITHOUT CONSENT IN WRITING.
	<b>Material:</b> Borosilicate Glass Microfibres bonded with Epoxide Ester resin only		
<b>DO NOT SCALE DRAWING          IF IN DOUBT ASK</b>			