



# HF Headline Filters

## Filter Element: SS-25-64-10

| Technical Specification          |   |
|----------------------------------|---|
| <b>Description</b>               | Stainless steel Filter Element                                    |
| <b>Materials of Construction</b> | 316 sintered stainless steel                                      |
| <b>Filtration Efficiency</b>     | 10 Micron Nominal   |
| <b>Air Flow Resistance</b>       | 16 KPa at 6 m/min in air at 25°C                                  |
| <b>Dimensions</b>                | I.D. - 25.80mm ± 0.25mm   |
|                                  | O.D. - 29.00mm ± 1.5mm  |
|                                  | Length - 61.00mm ± 0.25mm   |
| <b>Strength (dry)</b>            | Collapse minimum - 175 Bar  |
| <b>Temperature Resistance</b>    | -50°C to +480°C maximum in air                                    |
| <b>Chemical Resistance</b>       | Resistant to all mineral, vegetable                               |
|                                  | And synthetic compressor lubricants.                              |
|                                  | Consult chemical resistance chart for<br>Other gases and liquids. |

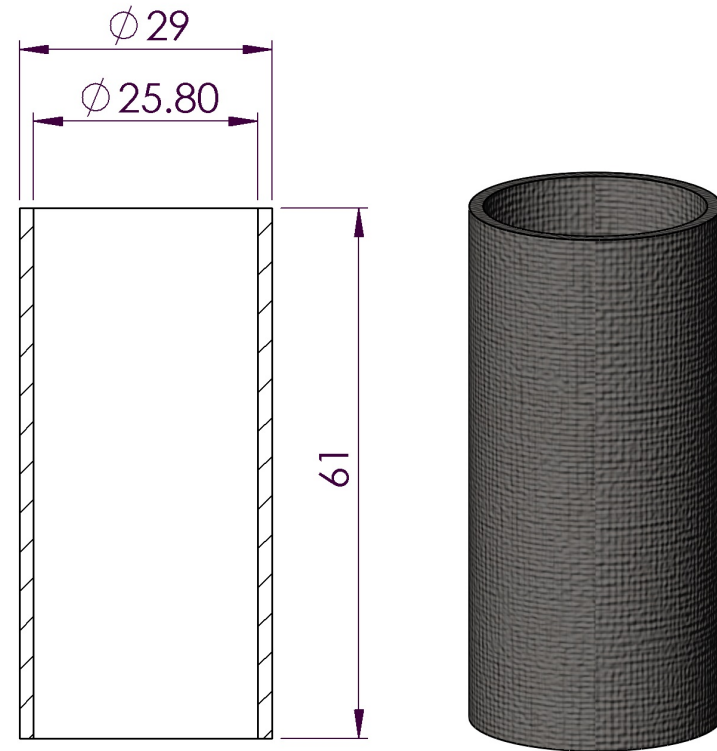

For further specific information please contact our Technical Department  
This is a guide only

|   |  |   |  |
|---|--|---|--|
| Headline Filters Limited Mill Hall Business Estate<br>Aylesford<br>Kent, ME20 7JZ<br><a href="http://www.headlinefilters.com">www.headlinefilters.com</a><br><a href="mailto:info@headlinefilters.com">info@headlinefilters.com</a> | <b>Filter Element: SS-25-64-10</b>               |   | THE COPYRIGHT OF THIS DRAWING IS<br>RESERVED BY HEADLINE FILTERS. IT<br>IS ISSUED ON CONDITION THAT IT IS<br>NOT COPIED, REPRODUCED OR<br>DISCLOSED TO A THIRD PARTY<br>EITHER WHOLLY, OR IN PART<br>WITHOUT CONSENT IN WRITING. |
|   | <b>Material:</b><br>316 sintered stainless steel |  |  |
| <b>DO NOT SCALE DRAWING<br/>         IF IN DOUBT ASK</b>  |  |   |  |