



HF Headline Filters

Filter Element: SS-51-230-10V

| Technical Specification | |
|----------------------------------|--|
| Description | Stainless steel Filter Element |
| Materials of Construction | 316 sintered stainless steel |
| Seals | Viton |
| Filtration Efficiency | 10 Micron Nominal |
| Air Flow Resistance | Less than 2.8 KPa at 6 m/min in air at 25°C |
| Dimensions | I.D. - 51.00mm ± 0.25mm |
| | O.D. - 55.00 ± 1.5mm |
| | Finished Length with seals - 230.00 ± 0.25mm |
| Strength (dry) | Collapse minimum - 175 Bar |
| Temperature Resistance | -50°C to +480°C maximum in air |
| Chemical Resistance | Resistant to all mineral, vegetable And synthetic compressor lubricants. Consult chemical resistance chart for Other gases and liquids. |

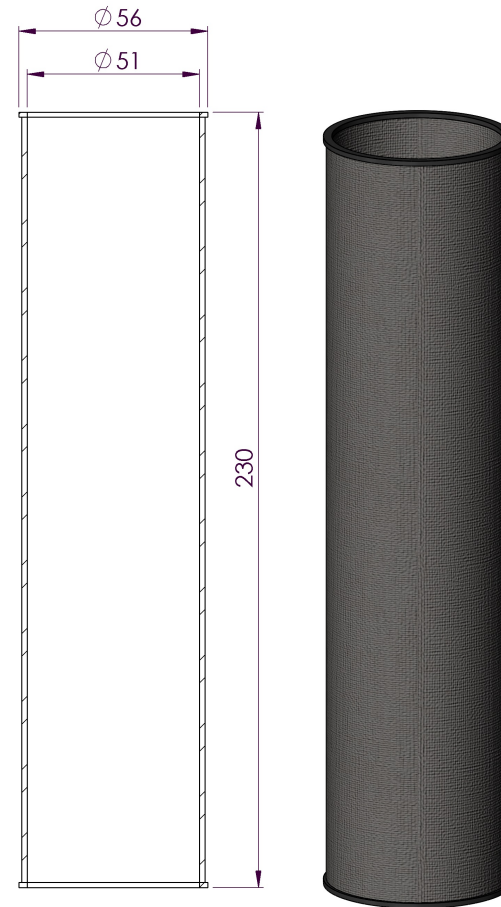

For further specific information please contact our Technical Department
This is a guide only

| | | | |
|---|--|---|--|
| Headline Filters Limited Mill Hall Business Estate Aylesford Kent, ME20 7JZ www.headlinefilters.com info@headlinefilters.com | Filter Element: SS-51-230-10V | | THE COPYRIGHT OF THIS DRAWING IS RESERVED BY HEADLINE FILTERS. IT IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY, OR IN PART WITHOUT CONSENT IN WRITING. |
| | Material: 316 sintered stainless steel |  | |
| DO NOT SCALE DRAWING IF IN DOUBT ASK | | | |